

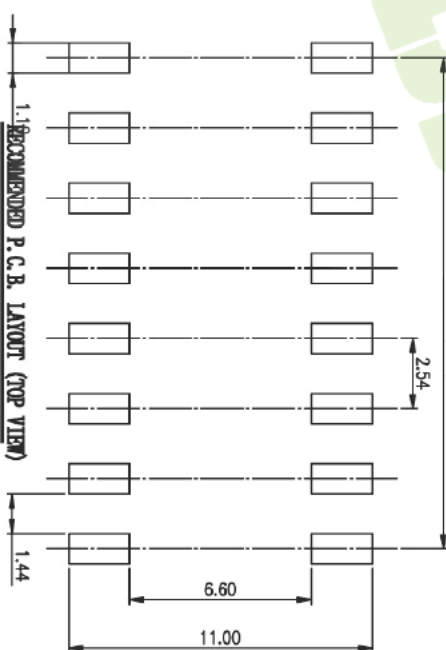


- NOTES :
- 1>.Operation force:10000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature: -40° to+85°
 - 4>.Mechanical Life:3000cycles minimum
 - 5>.Electrical Life:2000cycles minimum
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

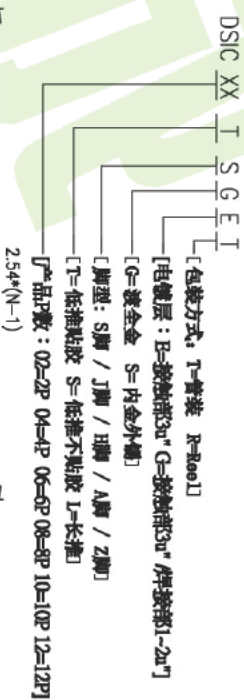

(Construction)



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		ANGLES		PROJECTION	DRAWING	CHECK	APPRO.
LINER	OTHERWISE SPECIFIED	0. ± 0.25	0. ± 2'				
.00 ± 0.15	.0 ± 1'	.00 ± 0.10	.00 ± 0.5'	[Symbol]	DESIGN		
				2012/04/12			
				kathy			

www.ycelectron.com

M6-CF2. 54MM

FILE NO.	UNIT	SCALE	SHEET	REV.
A4	mm	2 : 1	1 OF 1	A