

SCHEMATIC(TYP.)



Note:

1. All dimensions are in millimeters.
2. General tolerance: ± 0.2 mm.
3. Material:

Base:UL94V-0 PBT Thermoplastic(Black).
 Cover:UL94V-0 PBT Thermoplastic(Black/Red/Blue).
 Actuators:UL94V-0 PA66 Thermoplastic(White).
 Contact plating:Gold plating over nickel.
 Pitting material:Epoxy.

4. Electrical


Electrical:2000 Operations per switch 24/VDC,25mA.
 Non-Switching Rating:100mA, 50/VDC.
 Switching Rating:25mA, 24/VDC
 Contact Resistance:100 mΩ Max.at initial.

5. Mechanical

Mechanical life:2000 Operations per switch.
 Operation Temp:-20℃ to 70℃.
 Storage Temp:-40℃ to 85℃.

6. PART NUMBER DESCRIPTION:

DS DP 06 L H G E T

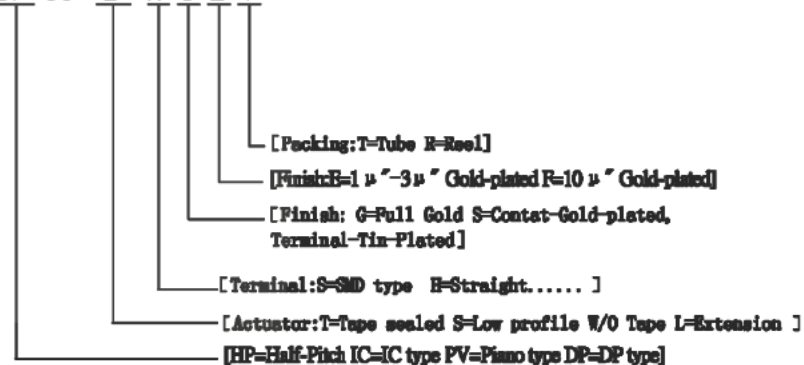

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION	深圳市裕诚电子有限公司 SHENZHEN YUCHENG ELECTRONICS CO.,LTD						
LINER	ANGLES		www.ycelectron.com						
.0 ± 0.30	0. ± 1°		M6-KF2.54MM						
.00 ± 0.20	.0 ± 0.5°		DESIGN	LU ER XIN	2013/07/02	FILE NO. DSDP06UHGET-A			
.000± 0.10	.00±	DRAWING			SIZE	UNIT	SCALE	SHEET	REV.
DESIGN		CHECK			A4	mm	FIT	1 OF 1	A
DRAWING		APPRO.							