

Note:  
 1. All dimensions are in millimeters.  
 2. General tolerance:  $\pm 0.2\text{mm}$ .  
 3. Material:


Base: UL94V-0 PBT Thermoplastic (Black).  
 Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).  
 Actuators: UL94V-0 PA66 Thermoplastic (White).  
 Contact plating: Gold plating over nickel.  
 Pitting material: Epoxy.

4. Electrical  
 Electrical: 2000 Operations per switch 24VDC, 25mA.  
 Non-Switching Rating: 100mA, 50VDC.  
 Switching Rating: 25mA, 24VDC  
 Contact Resistance: 100 mΩ Max at initial.

5. Mechanical  
 Mechanical life: 2000 Operations per switch.  
 Stroke: 2.0mm.  
 Operation Temp: -20°C to 70°C.  
 Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS WB 08 L H G E T

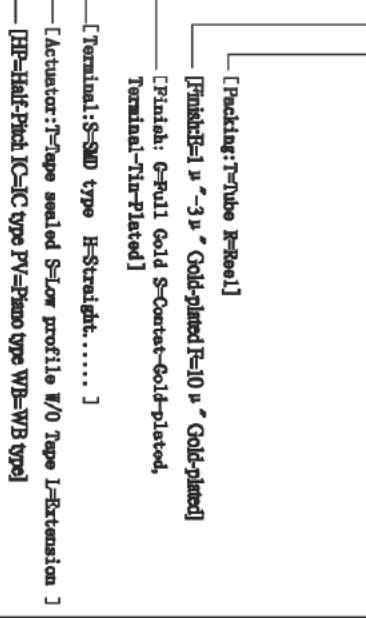

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJECTION		www.ycelectron.com	
LINER	0 ± 0.30	ANGLES	0 ± 1°	深圳市裕诚电子有限公司	
	.00 ± 0.20		.0 ± 0.5°	SHENZHEN YICHENG ELECTRONICS CO., LTD	
	.000± 0.10		.00±	2013/07/02	
DESIGN	LU ER XIN			M6-GF宽体平拨	
DRAWING				DSWB08HGT-A	
CHECK				SIZE UNIT SCALE SHEET REV.	
APPRO.				A4 mm HIT TOP-1 A A	