
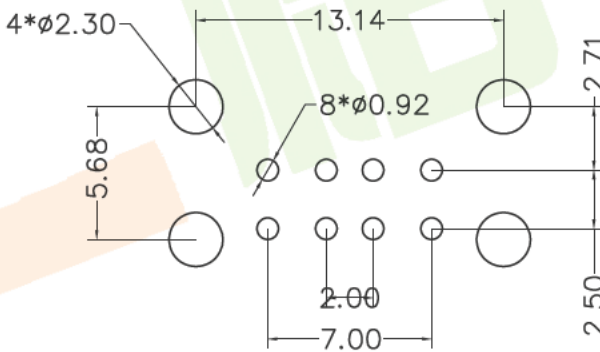
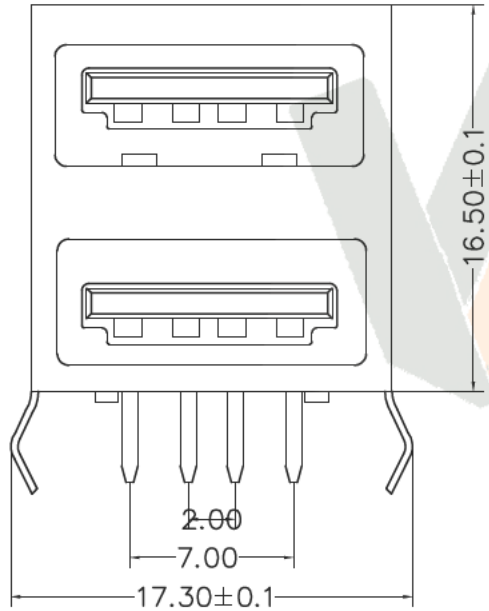
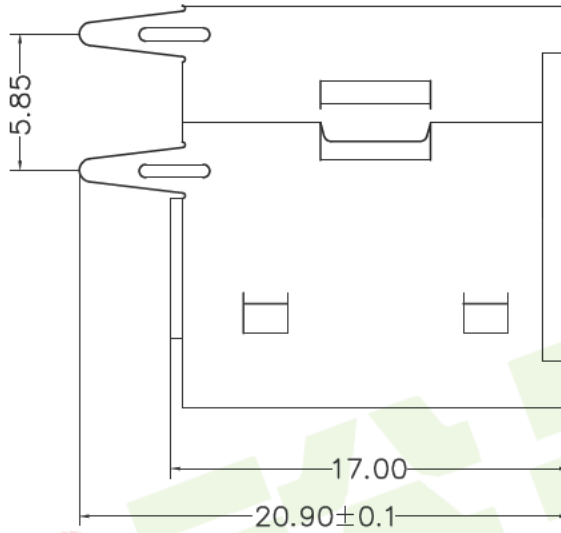


符合RoHS环保要求

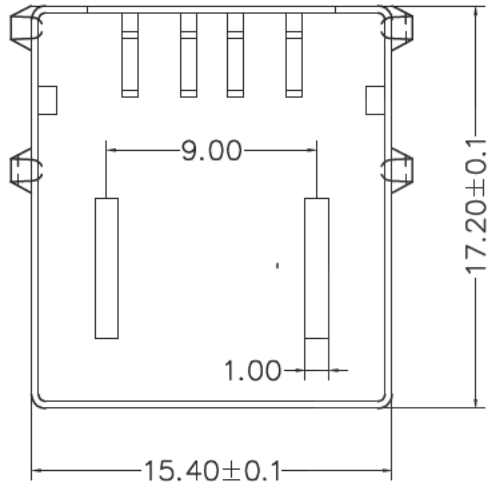

PCB.LAYOUT

特性:Specifications:

电器:Electrical:

接触阻抗:Contact Resistance

30 milliohms MAX

耐电压:Dielectric Withstanding Voltage:

500V AC AT Sea Level

绝缘阻抗:Insulation Resistance:

1000 MEGA ohms MIN

材料:Material:

塑胶:PBT

端子:Contact:Copper Alloy C2680H

铜壳/铁壳:Shell: Copper Alloy C2680H/Spcc

电镀:Finish:

端子:Contact: Plated Gold in Mating Area;

Tin/ On Solder Tails

接触点镀金.脚镀锡

铜壳/铁:Shell:

Nickel Plating

镀镍

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

.X	±0.15	.X	±5°
.XX	±0.05	.X	±2°
.XXX	±0.02	.XX	±1°

www.ycelectron.com



深圳市裕诚电子有限公司

SHENZHEN YUCHENG ELECTRONICS CO., LTD

单位 UNITS	MM	制图 DRAWING	陈雅	制图料号 PRODUCT PART NO	USB-S172Q
比例 SCALE	1:1	审核 CHKD	洪章波	产品名称 PRODUCT NAME	USB AF 90° 双层全包
日期 DATE	2016.2.5	核准 APPD	魏杰	角法 VIEW	版本 VER
					A0