
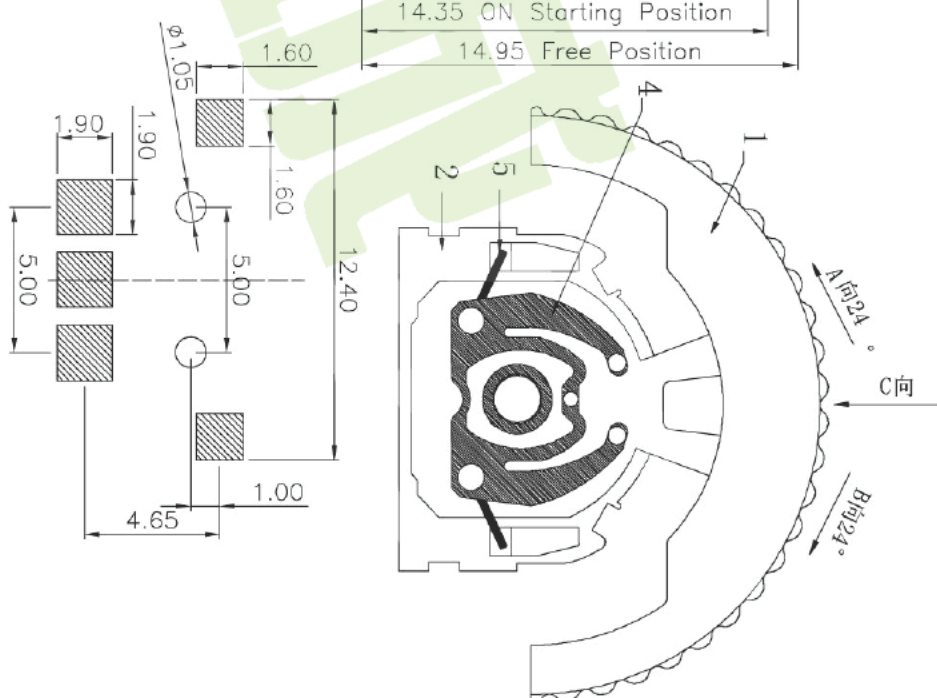



- NOTE:
1. Rating : DC 5V 10mA
 2. Contact Resistance: 100m ΩMAX
 3. Insulation Resistance: 100M ΩMIN
 4. Soldering Temper: 260±5°/5s
 5. Mechanical Life: 100,000 cycles
 6. Ever Portion 80 ± 50 gf
 7. Push Portion 205 ± 80 gf
 8. Travel: -24° 0' +24°

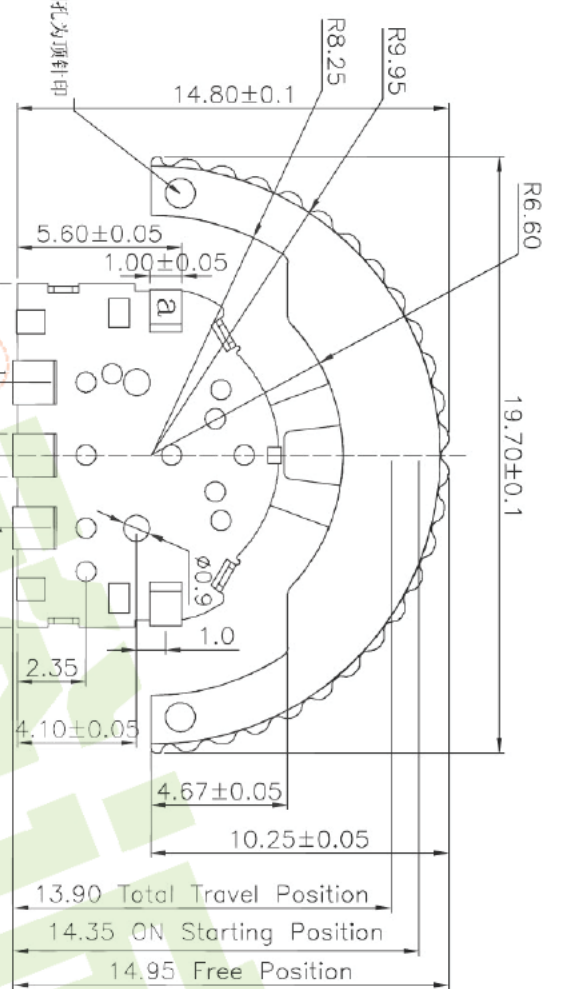

A向24° a与b

B向24° a与d

C向150g
a与c通

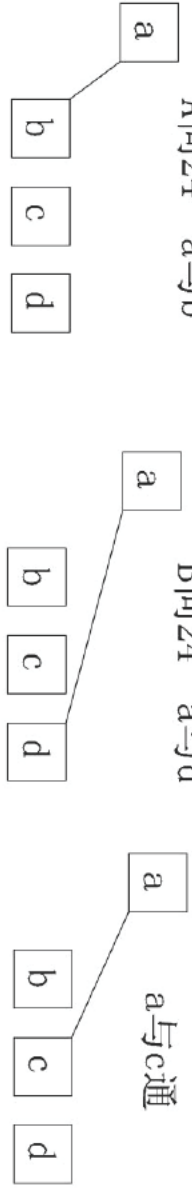

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Spring	---	1	SUS	Natural	---
④	Terminal	---	5	Phosphor Bronze	Plating silver	---
③	Cover	---	1	SUS	Natural	---
②	Base	---	1	LCP	Black	---
①	Keystroke	---	1	PPA	Black	---

APPROVALS		DATE		WEBSITE	
DRAWN	KUN.LU	2013/8/8	www.ycelelectron.com	深圳市裕诚电子有限公司 SHENZHEN YUCHENG ELECTRONICS CO., LTD	
CHECKED					
APPROVALS					
DRAWN		DATE		WEBSITE	
KUN.LU		2013/8/8		www.ycelelectron.com	
CHECKED					
APPROVALS					
TOLERANCES ARE		30~40±0.30	±0.30	ANGLE	
10~30		±0.20		UNIT:	mm
5~10		±0.15		SCALE:	1:1
~5		±0.10		DRAWING NO.	
					PROJ:
					SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			