




- Typical Specifications
1. Rating : 5A120V AC
 2. Insulation Resistance:1,000M min
 3. Dielectric Strength:1,500V RMS
 4. Operating Life : 30,000 cycles

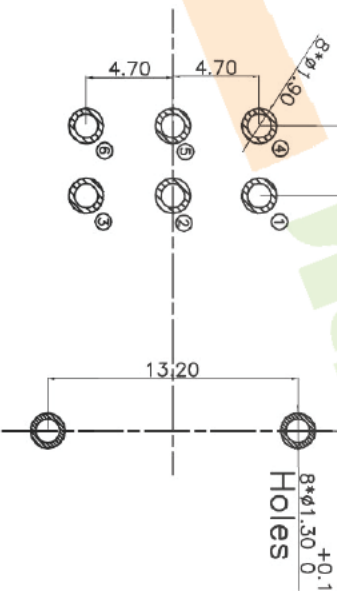

Circuit Diagram



PCB Layout(pattern side)

PART NO	vigor
1	300±100

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	6	Copper	Plating silver	—
④	Contact	—	1	F.Ag/C5210	—	—
③	Base	—	1	PA	Black	—
②	Cover	—	1	SPCC	Plating Sn	—
①	Keystoke	—	1	PA	RED	—

APPROVALS	DATE	WEBSITE	SCALE: 1:1
DRAWN	2015.05.25	www.ycelectron.com	
深圳市裕诚电子有限公司 SHENZHEN YUCHENG ELECTRONICS CO., LTD			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE 30µm±0.15 10-30 ±0.20 5-10 ±0.15 ~ 5 ±0.10				ANGLE	UNIT: mm	DRAWING NO.
APPROVALS				PART NO.	SCALE: 1:1	PROJ. SHEET 1 OF 1
CHECKED				WEBSITE		
APPROVALS				WWW.YCELECTRON.COM		