



Circuit Diagram

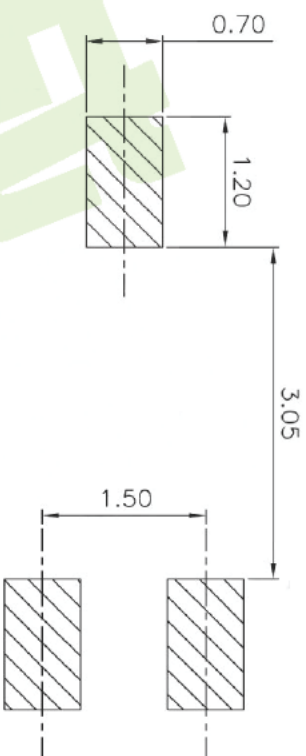

PCB Layout(Pattern side)

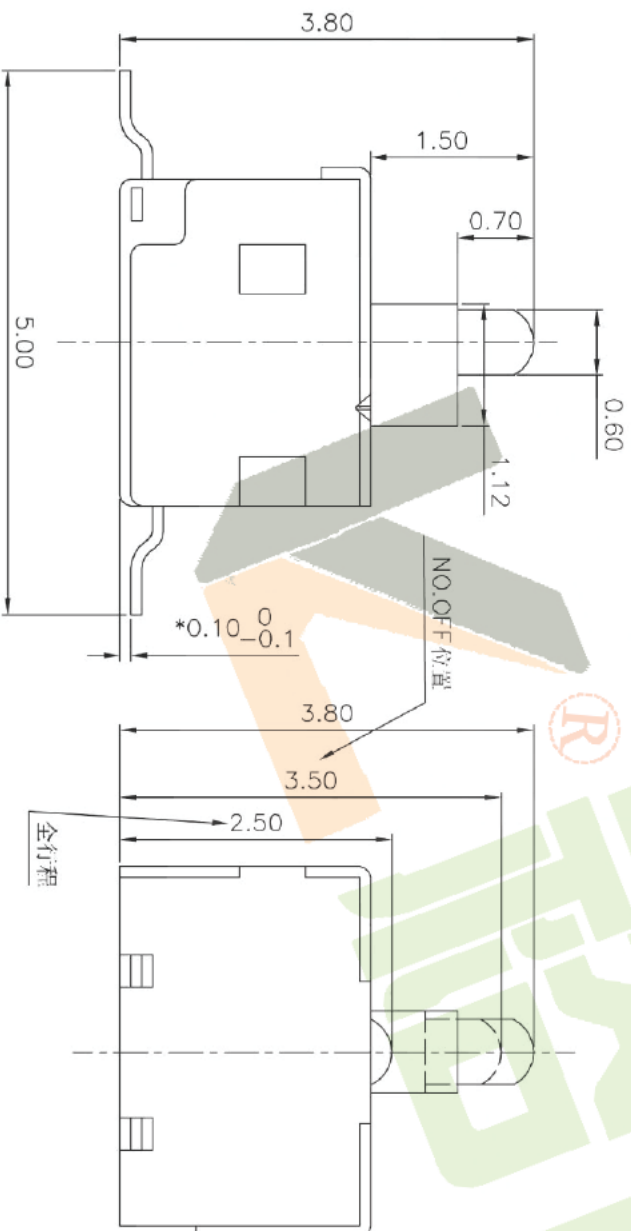

NOTE:
 Rating: DC 12V 50mA
 Operating Force: 20±10gf
 Lifetime: 100,000 Cycles
 Packaging: 2800pcs/Reel

| ITEM | PART NAME | TER.NO. | QTY. | MATERIAL | FINISHING | REMARK |
|------|----------------|---------|------|----------|-----------|--------|
| ⑤ | Contact Spring | — | 1 | Be Alloy | Ag Plated | — |
| ④ | Terminal | — | 3 | Brass | Ag Plated | — |
| ③ | Housing | — | 1 | PA46 | Black | — |
| ② | Cover | — | 1 | Brass | Ag Plated | — |
| ① | Slider | — | 1 | PA46 | Black | — |

| APPROVALS | DATE | WEBSITE |
|--------------------|-----------|--------------------|
| DRAWN JIANKUNLU | 2015.5.11 | www.ycelectron.com |

| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
|---------|------|-------|--------------|---------|--------|--------|
| | A | | NEW | | | |

| APPROVALS | PART NO. | SCALE: | PROJ. |
|----------------|-------------|--------|--------------|
| CHECKED | M5-1616E | 1:1 | — |
| TOLERANCES ARE | DRAWING NO. | | SHEET 1 OF 1 |

深圳市裕诚电子有限公司
 SHENZHEN YUCHENG ELECTRONICS CO., LTD