

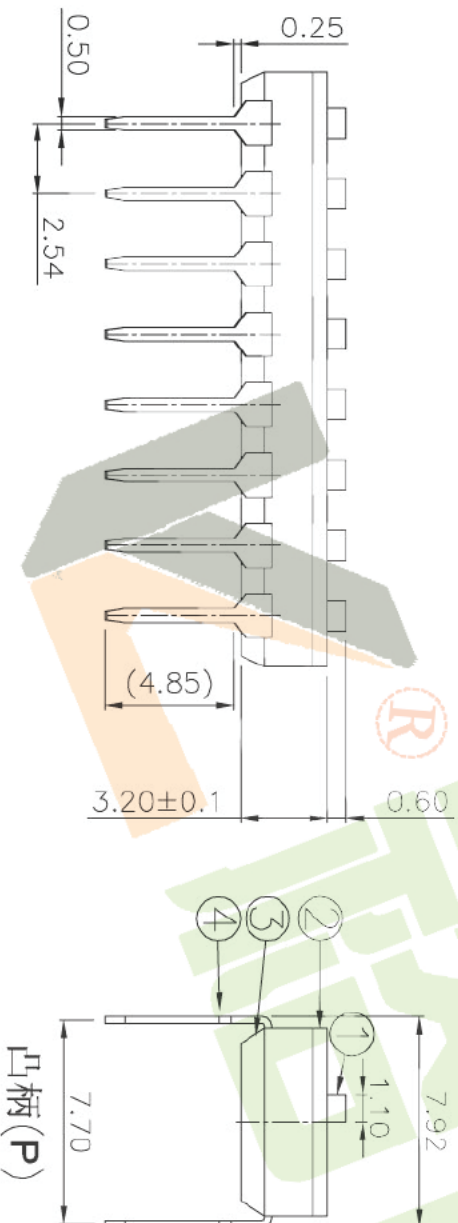
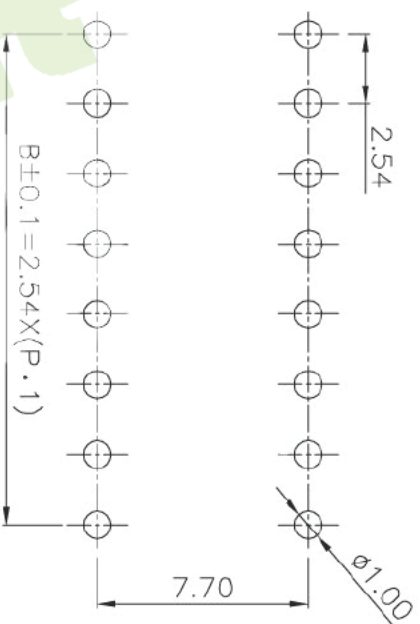


- NOTE:
- 1.Rating: 24V 25mA DC
 - 2.Insulation Resistance: ≥1100 MΩ
 - 3.Withstand voltage: AC 500V 1Minute
 - 4.Operating Force Range: 800gf Max
 - 5.Mechanical Life: 3,000 Cycles
 - 6.Operating Temperature range -20°~+70°C
 - 7.Ambient Humidity used: ≤85%RH



短柄 (S)



Position(位数)	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P
DIM.A(长度)	6.00	8.54	11.08	13.62	16.16	18.70	21.24	23.78	26.32	31.40
DIM.B(长度)	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	27.94
PART NO. 凸柄(P) 短柄(S)	ES-02KP ES-02KS	ES-03KP ES-03KS	ES-04KP ES-04KS	ES-05KP ES-05KS	ES-06KP ES-06KS	ES-07KP ES-07KS	ES-08KP ES-08KS	ES-09KP ES-09KS	ES-10KP ES-10KS	ES-12KP ES-12KS

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
④	Terminal	---	---	Phosphor bronze	Au Plating	---
③	Base	---	1	PBT	Black	---
②	Cover	---	1	PBT	Black	---
①	Keystoke	---	---	PBT	White	---

APPROVALS	DATE
DRAWN Coco.li	2014/02/13

CHECKED	WEBSITE
APPROVALS	www.ycelelectron.com
TOLERANCES ARE	PART NO. M6-SF2.54MM
30~50 ±0.30	SCALE: 1:1
10~30 ±0.20	UNIT: mm
5~10 ±0.15	DRAWING NO.
~5 ±0.10	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

深圳市裕诚电子有限公司
SHENZHEN YUCHENG ELECTRONICS CO., LTD