



PCB Layout(Pattern side)

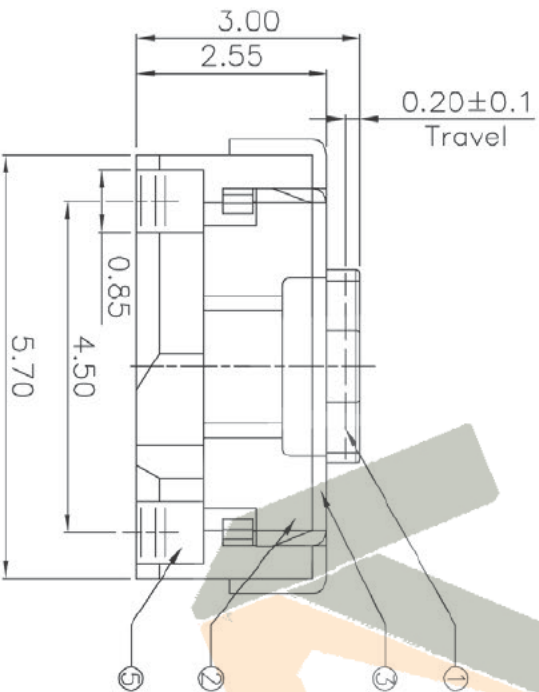

Typical Specifications :  
 1. Rating : DC 12V 50mA  
 2. Life:100,000 Cycles Min.

### NO.1

PART NO	WGOR
3	180±.30
4	250±.30

### NO.2-NO.3

PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Dust cover	—	1	KAPTON FILM	—	—
⑤	Terminal	—	2	Phosphor Bronze Plating silver	—	—
④	Contact	—	1	F.Ag/SUS	—	—
③	Base	—	1	LCP	Black	—
②	Cover	—	1	SUS	—	—
①	Keystoke	—	1	Nylon	WHITE	—

### APPROVALS

DRAWN J.X.Zhong 2013/6/24

### CHECKED

### APPROVALS

TOLERANCES ARE	30~0.15	±0.30	±0.20	±0.15	ANGLE	±2°
10~.30	±0.20	±0.15	±0.10	±0.10		
5~.10	±0.15	±0.10	±0.10			
~.5	±0.10	±0.10				



深圳市裕诚电子有限公司  
 SHENZHEN YUCHENG ELECTRONICS CO., LTD

WEBSITE [www.ycelectron.com](http://www.ycelectron.com)

PART NO. **M2-1872A**

SCALE: 1:1  
 DRAWING NO. \_\_\_\_\_  
 SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW

CHANGE.	CHECK.	APPRO.