



Circuit diagram

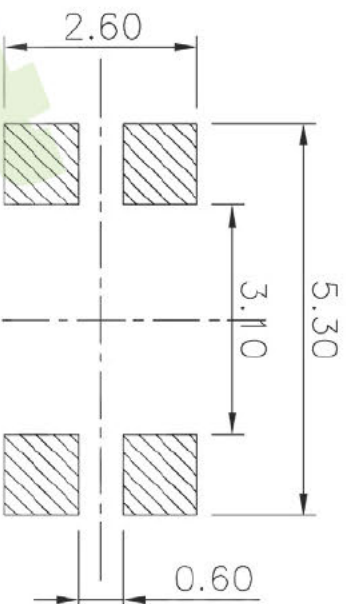

PCB Layout recommended

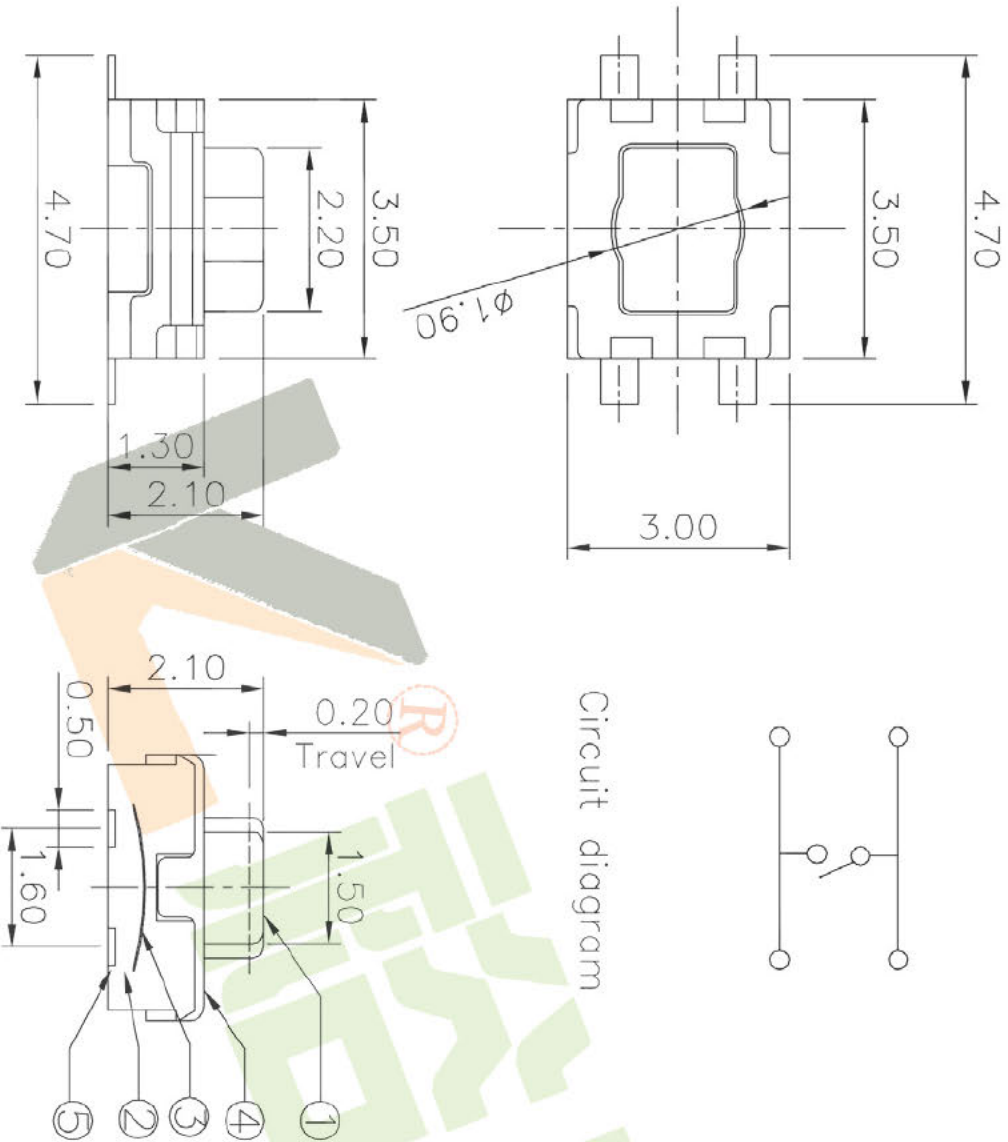

NOTE:  
 Rating: DC 12V 50mA  
 Lifetime: 100,000 Cycles  
 Packaging: 3000pcs/Reel

NO.1	
PART NO	vigor
2	130±30
3	160±30
4	250±30

NO.2-NO.3	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	4	Phosphor Bronze	Ag-PLATED	—
④	Shell	—	1	SUS	Natural	—
③	Contact	—	1	SUS	Ag-PLATED	—
②	Base	—	1	Nylon	Black	—
①	Keystroke	—	1	Nylon	Black	—

APPROVALS	DATE
DRAWN JKUNLU	2013/7/15

深圳市裕诚电子有限公司  
 SHENZHEN YUCHENG ELECTRONICS CO., LTD

WEBSITE	www.ycelectron.com
PART NO.	M2-3921A

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—
TOLERANCES ARE						
30~0.15	±0.30	ANGLE	±2°	UNIT: mm	SCALE: 1:1	PROJ. SHEET 1 OF 1