



Circuit Diagram

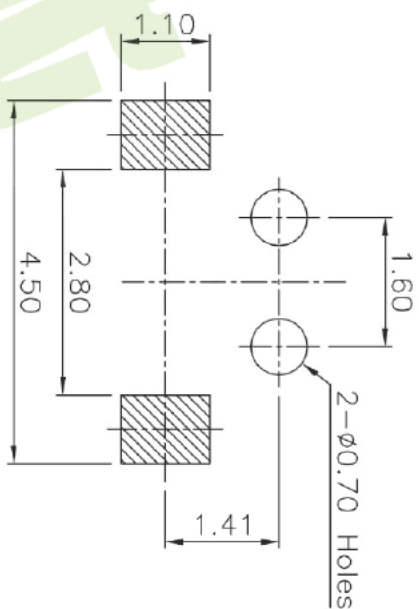

PCB Layout (Pattern side)

NOTE:
 Rating: DC 12V 50mA
 Operating Force: 20 ± 10 gf
 Lifetime: 100,000 Cycles



⑥	Spring	—	1	SUS	Ag Plated	—
⑤	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	LCP	Black	—
②	Cover	—	1	SUS	Natural	—
①	Slider	—	1	PA46	Black	—

APPROVALS	DATE	
DRAWN	J.X.Zhang	2013/9/6

深圳市裕诚电子有限公司
 SHENZHEN YUCHENG ELECTRONICS CO., LTD

WEBSITE: www.yucelectron.com

PART NO.: M5-1617A

APPROVALS	UNIT: mm	SCALE: 1:1	PROJ.:
TOLERANCES ARE	±0.30	±0.20	±0.15
	10~30	5~10	~5
	30~100	10~30	5~10
	±0.15	±0.10	±0.05
	±2°		
DRAWING NO.			
SHEET	1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			