


NOTES: 1.MATERIAL:  
 MOLDING: LCP UL94 V-0  
 CONTACT: COPPER ALLOY.  
 GOLD PLATED Min ON CONTACT AREA, 100u"  
 Min TIN (LEAD FREE) ON SOLDER AREA,  
 SHELL: SUS304-H,  
 50u" NICKEL PLATING OVER ALL.  
 SHILD: SUS304-H,  
 2.MECHANICAL:  
 INSERTION: 5~20N.  
 EXTRACTION: 8~20N AFTER TEST.  
 DURABILITY: 10000 CYCLES  
 3.ELECTRICAL:  
 CURRENT: 5A FOR VBUS;  
 1.25A FOR GND PIN.  
 0.25A FOR OTHER.  
 VOLTAGE: 20 V MAX  
 WITHSTANDING VOLTAGE: 100V AC R.M.S.  
 CONTACT RESISTANCE: 40mΩ MAX.  
 INSULATION RESISTANCE: 100MΩ MIN.  
 4.ENVIRONMENTAL  
 TEMPERATURE RANGE -25°C ~ +85°C

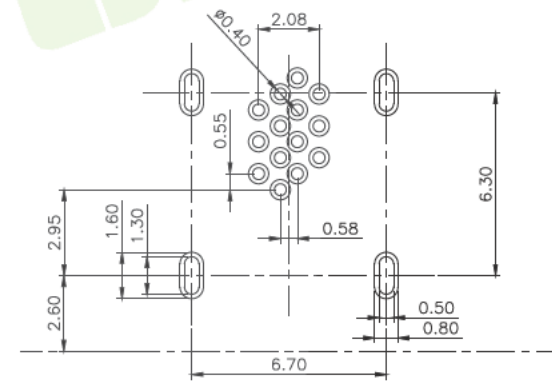

PCB LAYOUT (RECOMMENDED)  
 (Tol: ±0.05)

<p>产品图                  PRODUCT CHART DWG</p>				<p>深圳市裕诚电子有限公司                  SHENZHEN YUCHENG ELECTRONICS CO., LTD</p>							
<p>公差一览表                  TOLERANCE UNLESS OTHERWISE</p>				单位 UNITS	MM	制图 DRAWING	陈雅	制图料号 PRODUCT PART NO.	TYPE-C-QB14		
X.	±0.35	X.	±5.°	比例 SCALE	1:1	审核 CHKD	洪章波	产品名称 PRODUCT NO.	USB 3.1 C TYPE 侧插成品		
.XX	±0.20	.XX	±1.°	日期 DATE	2016-09-09	核准 APPD	魏杰	角法 VIEW		版本 VER	A0
.XXX	±0.10	.XXX	±0.5°								