


RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

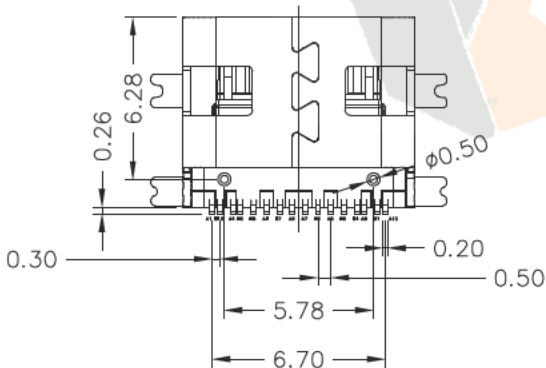

备注:

1. 材质:

- 1.1 胶芯: LCP+30%G.F UL94V-0
- 1.2 端子: C18140, T=0.12mm; 镍底, 镀金Xμ" 或亮锡100μ"
- 1.3 外壳: 不锈钢, T=0.30mm; 表面镀镍100μ" 或亮锡100μ"

2. 主要特性:

- 2.1 额定电流: 3A
- 2.2 接触阻抗: 40mΩ MAX
- 2.3 绝缘阻抗: 100MΩ MIN 250V DC
- 2.4 耐压测试: 100V AC
- 2.5 沾锡性: 温度250±5℃, 时间5±0.5s
- 2.6 整体插入力: 2.0kgf MAX  
整体拔出力: 0.6kgf MIN
- 2.7 使用寿命: 5000次
- 2.8 工作温度: -30℃~+80℃



深圳市裕诚电子有限公司

SHENZHEN YUCHENG ELECTRONICS CO., LTD

.X: ±0.25	X: ±1°	APP.	陈雅	DWG NO.	LZUC30001 (CU)
.XX: ±0.15	.X: ±0.5°	CHK.	洪章波	TITLE	USB 3.1 C 16PF SMT 板上母座 单排短体2.0版
.XXX: ±0.05	.XX: ±0.02°	DGN.	魏杰	SERIES	TYPE-C-QT16
UNIT	mm	DRW.	2016.2.5		
SCALE	1:1				
REV.	A0	SHEET:	1/1		