


符合RoHS环保要求

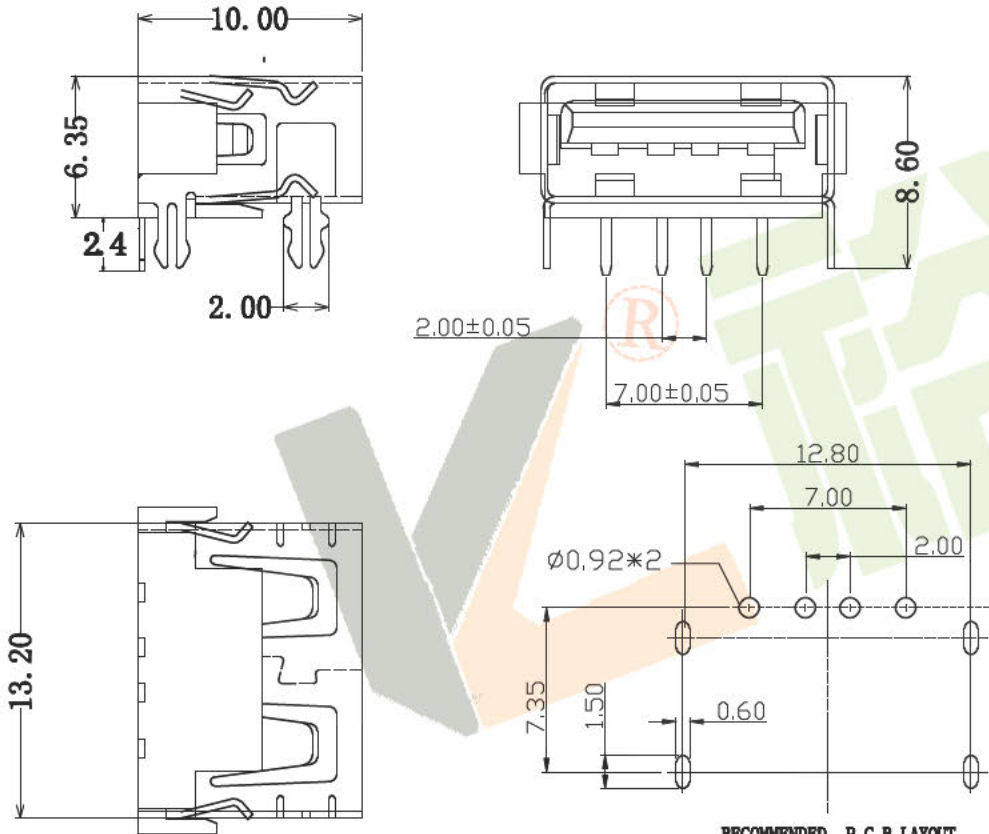

- NOTES:**
- MATERIAL SPECIFICATION**
 - INSULATION MATERIAL THERMOPLASTIC.
 - SHELL: COPPER ALLOY/SPCC, T: 0.30mm
PLATING: NICKEL
 - TERMINAL: COPPER ALLOY, T: 0.25mm
PLATING: GOLD/TIN PLATED.
 - ELECTRICAL CHARACTERISTIC:**
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - CONTACT RESISTANCE: 30mΩ MAX.
 - WITHSTANDING VOLTAGE: 500V AC.
 - MECHANICAL CHARACTERISTICS:**
 - INSERTION FORCE: 3.57Kgf MAX.
 - EXTRACTION FORCE: 1.02Kgf MIN.


ORDERING INFORMATION
A 02-D X X X X X 0 X-1063

- 结构流水码:
1060: 两个鱼叉脚1.9(有翻边)
1061: 两个鱼叉脚2.3(有翻边)
1062: 两个鱼叉脚2.3(有翻边, 端子外露2.3)
1063: 两个鱼叉脚1.9(无翻边)
- 包装方式区分码:
1: 格子盒
- 胶芯颜色区分码:
0: 黑色
- 胶芯材质区分码:
1: PBT
2: LCP
- 端子电镀区分码:
1: G/F 1U" 引脚亮锡
- 外壳电镀区分码:
1: NI ≥ 60μ" 2: NI ≥ 80μ"
3: NI ≥ 100μ" 4: NI ≥ 150μ"
- 外壳材质区分码:
1: Copper Alloy
2: SPCC
- D: DIP
USB 2.0 F
- A TYPE

RECOMMENDED P.C.B LAYOUT

<p>产品图 PRODUCT CHART DWG</p> <p>公差一览表 TOLERANCE UNLESS OTHERWISE</p> <table border="1"> <tr> <td>.X</td> <td>±0.15</td> <td>X</td> <td>±5°</td> </tr> <tr> <td>.XX</td> <td>±0.05</td> <td>.X</td> <td>±2°</td> </tr> <tr> <td>.XXX</td> <td>±0.02</td> <td>.XX</td> <td>±1°</td> </tr> </table> <p>www.ycelectron.com</p>		.X	±0.15	X	±5°	.XX	±0.05	.X	±2°	.XXX	±0.02	.XX	±1°	<p>深圳市裕诚电子有限公司 SHENZHEN YUCHENG ELECTRONICS CO., LTD</p>	
.X	±0.15	X	±5°												
.XX	±0.05	.X	±2°												
.XXX	±0.02	.XX	±1°												
单位 UNITS	MM	制图 DRAWING	陈雅	制图料号 PRODUCT PART NO	USB-90D10S-4C										
比例 SCALE	1:1	审核 CHKD	洪章波	产品名称 PRODUCT NAME	90度10.0直边										
日期 DATE	2016.2.5	核准 APPD	魏杰	角法 VIEW	版本 VER										
					A□										

符合RoHS环保要求

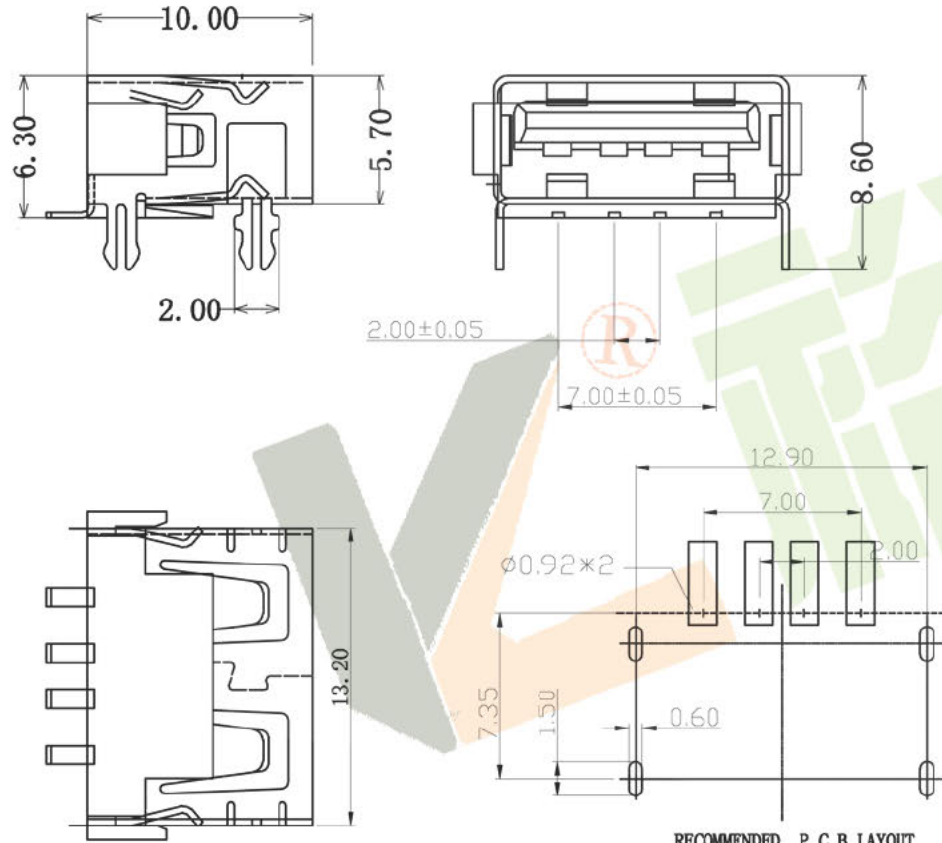

NOTES:

1. MATERIAL SPECIFICATION

- 1) INSULATION MATERIAL THERMOPLASTIC.
- 2) SHELL: COPPER ALLOY/SPCC, T: 0.30mm
PLATING: NICKEL
- 3) TERMINAL: COPPER ALLOY, T: 0.25mm
PLATING: GOLD/TIN PLATED.

2. ELECTRICAL CHARACTERISTIC:

- 1) INSULATION RESISTANCE: 1000MΩ MIN.
- 2) CONTACT RESISTANCE: 30mΩ MAX.
- 3) WITHSTANDING VOLTAGE: 500V AC.

3. MECHANICAL CHARACTERISTICS:

- 1) INSERTION FORCE: 3.57Kgf MAX.
- 2) EXTRACTION FORCE: 1.02Kgf MIN.

ORDERING INFORMATION

A 02-D X X X X 0 X-1063

结构流水码:

- 1060: 两个鱼叉脚1.9(有翻边)
- 1061: 两个鱼叉脚2.3(有翻边)
- 1062: 两个鱼叉脚2.3(有翻边, 端子外露2.3)
- 1063: 两个鱼叉脚1.9(无翻边)

包装方式区分码:

1: 格子盒

胶芯颜色区分码:

0: 黑色

胶芯材质区分码:

1: PBT

2: LCP

端子电镀区分码:

1: G/F 10" 引脚亮锡

外光电镀区分码:

1: NI ≥ 60μ" 2: NI ≥ 80μ"

3: NI ≥ 100μ" 4: NI ≥ 150μ"

外光材质区分码:

1: Copper Alloy

2: SPCC

D: DIP

USB 2.0 F

A TYPE

RECOMMENDED P.C.B LAYOUT

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

.X	±0.15	X.	±5'
.XX	±0.05	.X	±2'
.XXX	±0.02	.XX	±1'

www.ycelectron.com




深圳市裕诚电子有限公司

SHENZHEN YUCHENG ELECTRONICS CO., LTD

单位 UNITS	MM	制图 DRAWING	陈雅	制图料号 PRODUCT PART NO	USB-90D10S-4T
比例 SCALE	1:1	审核 CHKD	洪章波	产品名称 PRODUCT NAME	90度10.0贴板直边
日期 DATE	2016.2.5	核准 APPD	魏杰	角法 VIEW	版本 VER
					A□

符合RoHS环保要求

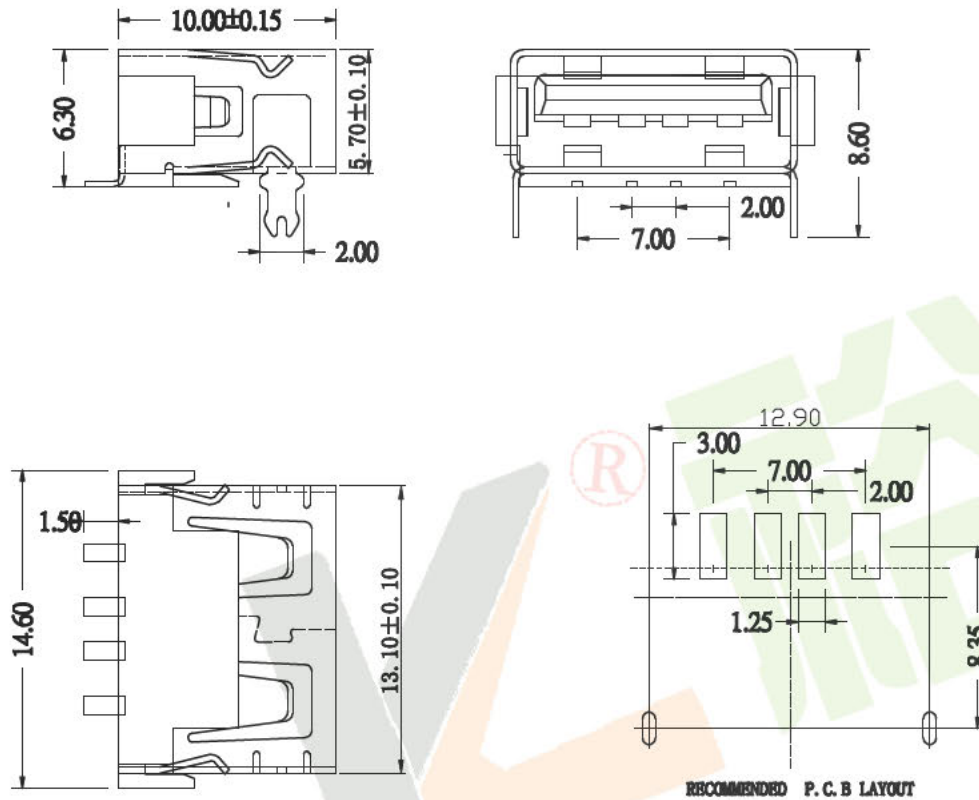

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Ternmaplastics,
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area
Tin On Solder Tails

端子四周镀50U”(MIN)锡, 镀金区域镀100-200U”镀金1U”

2. 外壳: Shell:
铜壳四周镀80U”(MIN)锡

Nickel Plating

<p>产品图 PRODUCT CHART DWG</p>		<p>深圳市裕诚电子有限公司 SHENZHEN YUCHENG ELECTRONICS CO., LTD</p>			
<p>公差一览表 TOLERANCE UNLESS OTHERWISE</p>		单位 UNITS	制图 DRAWING	制图料号 PRODUCT PART NO	比例 SCALE
.X	±0.15	MM	陈雅	USB-90D10S-QZ	1:1
.XX	±0.05		洪章波	产品名称 PRODUCT NAME	90度10.0贴板直边
.XXX	±0.02		魏杰	角法 VIEW	版本 VER
www.ycelectron.com		日期 DATE	核准 APPD	角法 VIEW	A□